


HAK KONTENEROWY Z UCHEM KHK KL.8

- zgodny z wymaganiami dyrektywy maszynowej, zgodny z normą PN-EN 1677-1,
- współczynnik bezpieczeństwa: 4,
- wykonany z: stal klasa 8,
- wytrzymałość na rozciąganie 800 N/mm²,
- komponenty malowane proszkowo,
- odporny na korozję.

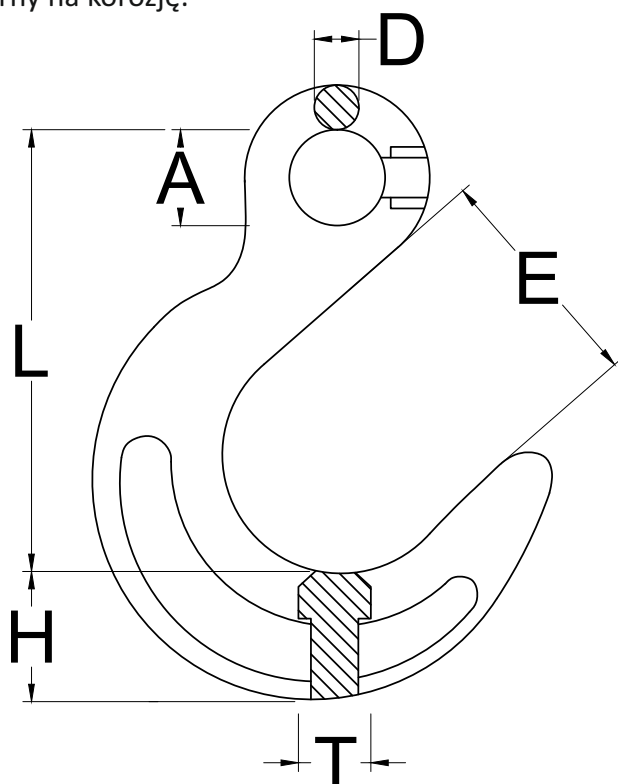

Kod	Rozmiar	WLL (t)	A (mm)	D (mm)	E (mm)	L (mm)	H (mm)	T (mm)	Waga kg/szt
KHK 200	7/8	2,00	18,0	12,0	63,5	120	31,0	25,0	1,09
KHK 315	10	3,15	22,0	16,0	76,0	146	33,0	32,0	1,95
KHK 530	13	5,30	27,0	19,0	89,0	175	44,5	38,0	3,22
KHK 800	16	8,00	32,0	20,5	101,0	205	51,5	46,0	5,26
KHK 1250	20	12,50	38,0	25,0	114,0	235	65,0	56,0	9,07
KHK 1500	22	15,00	45,0	45,0	127,0	264	68,5	57,0	11,79
KHK 2120	26	21,20	67,5	45,0	140,0	283	77,0	66,0	16,80
KHK 3150	32	31,50	81,5	45,0	153,5	327	97,5	80,0	26,60