
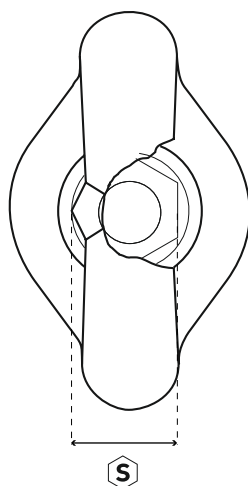


NAKRĘTKA Z UCHEM FE-SEB

- nakrętka z uchem,
- możliwość obrotu o 360°,
- ucho nośne i korpus wykonane ze stali stopowej,
- współczynnik bezpieczeństwa: 5,
- odporna na korozję,
- zgodna z normą EN 1677-1,
- zakres pracy od -20°C do +200°C.

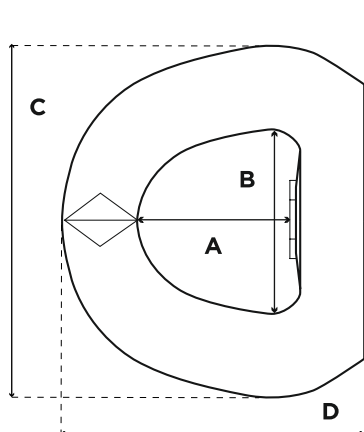

Kod	WLL SW 5:1 (t)	WLL SW 4:1 (t)	Gwint	L max (mm)	Moment obrotowy (Nm)	S (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Waga kg/szt
FE.SEB M8	0,40	0,50	M8	22	6	21	38	45	88	80	0,80
FE.SEB M10	0,50	0,70	M10	22	10	21	38	45	88	80	0,80
FE.SEB M12	0,80	0,90	M12	22	15	21	38	45	88	80	0,80
FE.SEB M16	1,40	1,80	M16	22	50	21	38	45	88	80	0,80
FE.SEB M20	2,00	2,70	M20	35	100	36	55	70	115	106	2,50
FE.SEB M24	3,20	4,20	M24	48	160	40	77	94	168	155	6,30
FE.SEB M30	5,50	6,30	M30	48	250	40	77	94	168	155	6,30
FE.SEB M36	9,40	11,00	M36	48	320	40	77	94	168	155	6,30